



#### ATYS

Hängeleuchte, Aluminiumdruckguss, matt pulverbeschichtet, 32° Ausstrahlwinkel, Kabellänge 1000mm, Baldachin H=35mm, inkl. Konverter 350mA

Suspended luminaire, die-cast aluminium, matt powder-coated, 32° beam angle, cable length 1000mm, ceiling base height 35mm, incl. converter 350mA

Lampada da sospensione in alluminio pressofuso, verniciata a polvere opaca, fascio luminoso 32°, lunghezza del cavo 1000mm, altezza della basetta 35mm, converter 350mA incluso

#### GILO

Hängeleuchte, Aluminiumdruckguss, matt Feinstruktur pulverbeschichtet, Diffusor aus opalem Acryl, inkl. Konverter 500mA - TRIAC dimmbar

Suspended luminaire, die-cast aluminium, matt powder-coated with fine textured paint, acrylic opal diffuser, incl. converter TRIAC dimmable

Lampada da sospensione in alluminio pressofuso, verniciata a polvere opaca, diffusore opale in acrilico, converter 500mA - dimmerabile TRIAC incluso

**W3** = LED 3000K

LT: 25000h




IP 20

#### ATYS LED

SYS 6,7W · 230V · CRI >90

<b>365-1002w</b>			324lm
<b>365-1002b</b>			324lm

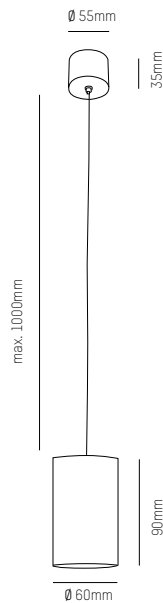

#### GILO LED

SYS 6,8W · 230V · CRI >90 · TRIAC dimm.

<b>472-260053wtr</b>		339lm
<b>472-260053btr</b>		339lm

