



MENDO

Pollerleuchte, Feinstruktur matt pulverbeschichtet, inkl. Konverter

Bollard luminaire, die-cast aluminium, matt powder-coated with fine textured paint, incl. converter

Bollard in alluminio pressofuso, verniciata a polvere opaca, converter incluso

FYNN CP AC

Pollerleuchte, AC-LED, Aluminium Feinstruktur pulverbeschichtet, Diffusor aus opalem Acryl

Bollard luminaire, AC-LED, die-cast aluminium, matt powder-coated with fine textured paint, acrylic opal diffuser

Bollard, AC-LED, verniciato a polvere opaca, diffusore opale in acrilico

W3 = LED 3000K

LT: 25000h


A++ - A

IP 54  

MENDO LED

SYS 8W · 230V · CRI >90

- 472-260046  313lm
- 472-260047  313lm

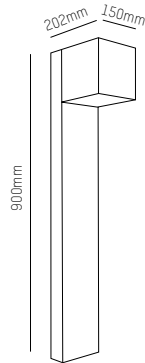

FYNN CP AC-LED

SYS 10W · 230V · CRI >90

- 472-260057s  642lm
- 472-260057ag  642lm

