



Dekorring innen standard schwarz  
Decor ring inside standard black



Aufbaustrahler, Aluminiumdruckguss, Feinstruktur matt pulverbeschichtet, Dekorring aus Kunststoff schwarz, Strahlerköpfe 90° schwenk- und 355° drehbar, 33° Ausstrahlwinkel, Wand- oder Deckenmontage, inkl. Konverter 500mA - TRIAC dimmbar


Surface mounted spotlight, die-cast aluminium, matt fine textured powder-coated, decoration ring in black synthetic, head 90° tilting and 355° swivelling, 33° beam angle, wall or ceiling mounting, incl. converter 500mA - TRIAC dimmable

Faretto da soffitto o parete in alluminio pressofuso, verniciato a polvere opaca, anello decorativo in plastica nera, testa 90° orientabile e 355° girevole, fascio luminoso 33°, montaggio a soffitto oppure a parete, converter 500mA - dimmerabile TRIAC incluso

**W3** = LED 3000K





LT: 25000h


**A++** - **A**

IP 20  

### MISSOR I LED

SYS 11,9W · 230V · CRI >90 TRIAC dimm.


276-0061290333056   660lm  
276-0061290333006   660lm

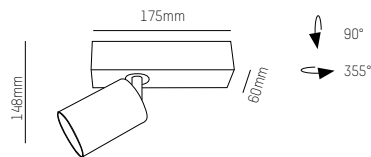

### MISSOR II LED

SYS 21,1W · 230V · CRI >90 TRIAC dimm.


276-0072190333056   1340lm  
276-0072190333006   1340lm

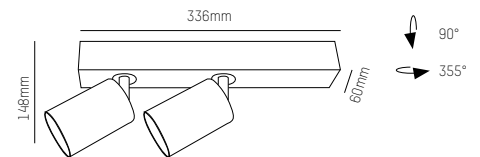

### DEKORRING/DECOR RING MISSOR

innenliegend, separat ordern / inside, order separately

276-7001   
276-7000 



### WAABEN RASTER/HONEY COMB LOUVRE MISSOR

werkzeuglos montierbar / mount without tools

276-1002 



