

TECHNICAL DATA SHEET

200CENT ROUND 1000LM PENDANT IP20

INDOOR - INTERNO - INNERBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Fix (not adjustable) 0° - 0°




Pendant

Material: Aluminium





**200CENT ROUND PENDANT
1000LM CRI 92**

2700°K	3000°K	
REF N° 518 26 930	REF N° 518 26 830	

7,1 W - 1000LM - 2 step MacAdam - **A+**
Serial wiring -  - **CE** -  - 
Requires remote LED driver - 600mA
Perfect beam 28°

REMOTE LED DRIVER ON/OFF

REF N° 697 00 015 min.2W max. 32W

230V/50Hz -  - current controlled
 - **CE** - IP20 - 600mA - not dimmable

REMOTE LED DRIVER DIM



REF N° 697 60 040 min.3W max. 60W


1-10V DALI PUSH

REF N° 697 30 015 min 2W max 20W DALI

REF N° 697 60 015 min 2W max 20W 1-10V PUSH

REF N° 697 76 020 min 2W max 20W PHASE DIM

230V/50Hz -  - current controlled
 - **CE** - IP20 - 600mA - dimmable

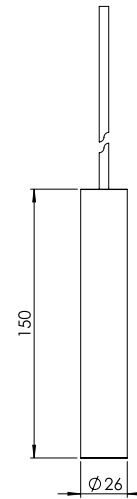

INSTALLATION KIT

REF N° 681 01 003 200Cent pendant cable black 3m

REF N° 681 02 003 200Cent pendant cable white 3m

REF N° 681 01 006 200Cent pendant cable black 6m

REF N° 681 02 006 200Cent pendant cable white 6m

BEAM ANGLES

STANDARD (included) beam angle 28°

TECHNICAL DATA SHEET

200CENT ROUND 750LM PENDANT IP20

INDOOR - INTERNO - INNERBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Fix (not adjustable) 0° - 0°


Pendant

Material: Aluminium




Black Black
Nero Nero
Schwarz Schwarz
Zwart Zwart
Noir Noir
Negro Negro

Ref N° 200 BL BL



White Black
Bianco Nero
Weiß Schwarz
Wit Zwart
Blanc Noir
Blanco Negro

Ref N° 200 WH BL



Black Chrome
Nero Cromo
Schwarz Chrom
Zwart Chrom
Noir Chrome
Negro Cromo

Ref N° 200 BL CR



White White
Bianco Bianco
Weiß Weiß
Wit Wit
Blanc Blanc
Blanco Blanco

Ref N° 200 WH WH



Black Gold
Nero Oro
Schwarz Gold
Zwart Goud
Noir Or
Negro Oro

Ref N° 200 BL GO



White Gold
Bianco Oro
Weiß Gold
Wit Goud
Blanc Or
Blanco Oro

Ref N° 200 WH GO



Black Copper
Nero Rame
Schwarz Kupfer
Zwart Koper
Noir Cuivre
Negro Cobre

Ref N° 200 BL CO



White Copper
Bianco Rame
Weiß Kupfer
Wit Koper
Blanc Cuivre
Blanco Cobre

Ref N° 200 WH CO



Bronze Bronze
Bronza Bronzo
Bronze Bronze
Brons Brons
Bronze Bronze
Bronce Bronce

Ref N° 200 BR BR




Brass Brass
Ottone Ottone
Messing Messing
Messing Messing
Laiton Laiton
Latón Latón

Ref N° 200 ME ME



Gold Black
Oro Nero
Gold Schwarz
Goud Zwart
Or Noir
Oro Negro

Ref N° 200 GO BL



Gold Gold
Oro Oro
Gold Gold
Goud Goud
Or Or
Oro Oro

Ref N° 200 GO GO

200CENT ROUND PENDANT 750LM CRI 92

2400°K	2700°K	3000°K	4000°K
REF N° 518 29 530	REF N° 518 29 930	REF N° 518 29 830	REF N° 518 29 730

6,2 W - 750LM - 2 step MacAdam - **A+**
Serial wiring - - **CE** - -
Requires remote LED driver - 250mA
Standard beam angle 36°

REMOTE LED DRIVER ON/OFF

REF N° 697 00 040 min.2W max. 30W

REF N° 697 00 080 min.27W max. 67W

230V/50Hz - - current controlled
 - **CE** - IP20 - 250mA - not dimmable

REMOTE LED DRIVER DIM

REF N° 697 60 040 min.3W max. 30W


1-10V DALI PUSH

REF N° 697 30 070 min 33W max 65W DALI

REF N° 697 60 080 min 27W max 67W 1-10V PUSH

REF N° 697 72 020 min 6W max 12,5W PHASE DIM

230V/50Hz - - current controlled
 - **CE** - IP20 - 250mA - dimmable

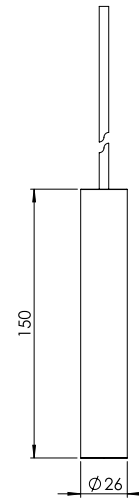

INSTALLATION KIT

REF N° 681 01 003 200Cent pendant cable black 3m

REF N° 681 02 003 200Cent pendant cable white 3m

REF N° 681 01 006 200Cent pendant cable black 6m

REF N° 681 02 006 200Cent pendant cable white 6m

BEAM ANGLES

STANDARD (included) beam angle 36°

TECHNICAL DATA SHEET


200CENT ROUND 500LM PENDANT IP20

INDOOR - INTERNO - INNERBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Fix (not adjustable) 0° - 0°

Pendant

Material: Aluminium



200CENT ROUND PENDANT 500LM CRI 92




2200°K	2700°K	3000°K	4000°K
REF N° 518 28 530	REF N° 518 28 930	REF N° 518 28 830	REF N° 518 28 730

5,9 W - 500LM - 2 step MacAdam - **A+**
 Serial wiring -  -  -  - 
 Requires remote LED driver - 700mA
 Standard Perfectbeam 24° - Optional 44° beam
 Ultra low glare (UGR < 13)

REMOTE LED DRIVER ON/OFF

REF N° 697 00 015 min.2W max. 32W

REF N° 697 00 025 min.2W max. 50W

230V/50Hz -  - current controlled
 -  - IP20 - 700mA - not dimmable

REMOTE LED DRIVER DIM

REF N° 697 60 040 min.3W max. 60W



1-10V DALI PUSH



REF N° 697 30 015 min 2W max 20W DALI

REF N° 697 60 015 min 2W max 20W 1-10V PUSH

REF N° 697 77 010 min 2W max 10W PHASE DIM

REF N° 697 77 020 min 11W max 20W PHASE DIM

230V/50Hz -  - current controlled
 -  - IP20 - 700mA - dimmable

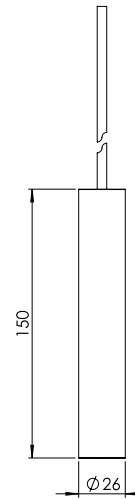

INSTALLATION KIT

REF N° 681 01 003 200Cent pendant cable black 3m

REF N° 681 02 003 200Cent pendant cable white 3m

REF N° 681 01 006 200Cent pendant cable black 6m

REF N° 681 02 006 200Cent pendant cable white 6m

BEAM ANGLES

STANDARD (included) beam angle 24°

REF N° 203 20 044 (option) beam angle 44°

TECHNICAL DATA SHEET


200CENT ROUND 250LM PENDANT IP20

INDOOR - INTERNO - INNERBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Fix (not adjustable) 0° - 0°

Pendant

Material: Aluminium



200CENT ROUND PENDANT 250LM CRI 92




2200°K	2700°K	3000°K	4000°K
REF N° 518 27 530	REF N° 518 27 930	REF N° 518 27 830	REF N° 518 27 730

3 W - 250LM - 2 step MacAdam - **A+**
 Serial wiring -  -  -  - 
 Requires remote LED driver - 1050mA
 Standard narrowbeam 12° - Optional 8° beam
 Ultra low glare (UGR < 13)

REMOTE LED DRIVER ON/OFF

REF N° 697 00 015 min.2W max. 39W

REF N° 697 00 025 min.2W max. 50W


230V/50Hz -  - current controlled
 -  - IP20 - 1050mA - not dimmable


REMOTE LED DRIVER DIM

REF N° 697 60 025 min.3W max. 60W

1-10V DALI PUSH

REF N° 697 70 050 min 2W max 45W PHASE DIM

230V/50Hz -  - current controlled
 -  - IP20 - 1050mA - dimmable

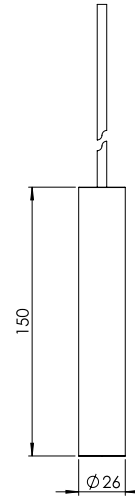

INSTALLATION KIT

REF N° 681 01 003 200Cent pendant cable black 3m

REF N° 681 02 003 200Cent pendant cable white 3m

REF N° 681 01 006 200Cent pendant cable black 6m

REF N° 681 02 006 200Cent pendant cable white 6m

BEAM ANGLES

STANDARD (included) beam angle 12°
 REF N° 203 20 008 (option) beam angle 8°