

TECHNICAL DATA SHEET

BIBA IP54

BATHROOM - STANZA DA BAGNO - BADEZIMMER - BADKAMER - SALLE DE BAINS - CUARTO DE BAÑO

Fix (not adjustable) 0° - 0°

82x169 mm

Material : CALCYT® plaster and frosted diffuser


REMOTE LED DRIVER ON/OFF

REF N° 697 00 006 8W

REF N° 697 00 015 15W

REF N° 697 00 025 25W

230V/50Hz -  - current controlled
 -  - IP20 - 350mA - not dimmable

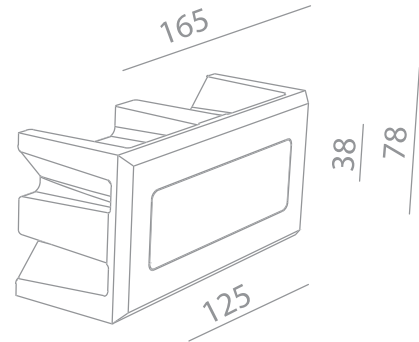

BIBA LED DIM 100 LM

REF N° 123 60 501 CRI 80 warm white 2200°K

REF N° 123 60 001 CRI 90 warm white 2700°K

REF N° 123 60 101 CRI 90 warm white 3000°K

REF N° 123 60 201 CRI 90 neutral white 4000°K

REF N° 123 60 301 royal blue

 - 1W - excl. LED driver - current controlled 350 mA -  -  - 
 -  - serial wiring - 3 Step MacAdam
Requires remote LED driver - 350 mA

REMOTE LED DRIVER DIM

REF N° 697 60 006 6W 1-10V

REF N° 697 60 015 15W 1-10V

REF N° 697 30 015 15W DALI

REF N° 697 60 025 25W 1-10V DALI PUSH

REF N° 697 60 040 40W 1-10V DALI PUSH

REF N° 697 70 009 9W PHASE DIM (tr. edge)

REF N° 697 70 017 17W PHASE DIM

230V/50Hz -  - current controlled
 -  - IP20 - 350mA - dimmable



Ready for installation in solid walls
Optional plasterkit for installation into gypsum walls

PLASTERKIT BIBA

REF N° 723 01 000 For mounting into gypsum walls
Housing: perforated aluminium

BIBA LED DIM 200 LM

REF N° 123 62 501 CRI 80 warm white 2200°K

REF N° 123 62 001 CRI 90 warm white 2700°K

REF N° 123 62 101 CRI 90 warm white 3000°K

REF N° 123 62 201 CRI 90 neutral white 4000°K

REF N° 123 62 301 royal blue

 - 2W - excl. LED driver - current controlled 350 mA -  -  - 
 -  - serial wiring - 3 Step MacAdam
Requires remote LED driver - 350 mA

BIBA LED DIM 400 LM

REF N° 123 61 501 CRI 80 warm white 2200°K


REF N° 123 61 001 CRI 90 warm white 2700°K


REF N° 123 61 101 CRI 90 warm white 3000°K

REF N° 123 61 201 CRI 90 neutral white 4000°K

REF N° 123 61 301 royal blue

 - 4W - excl. LED driver - current controlled 350 mA -  -  - 
 -  - serial wiring - 3 Step MacAdam
Requires remote LED driver - 350 mA

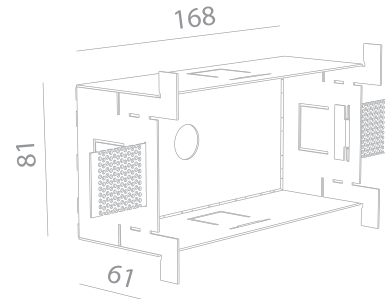

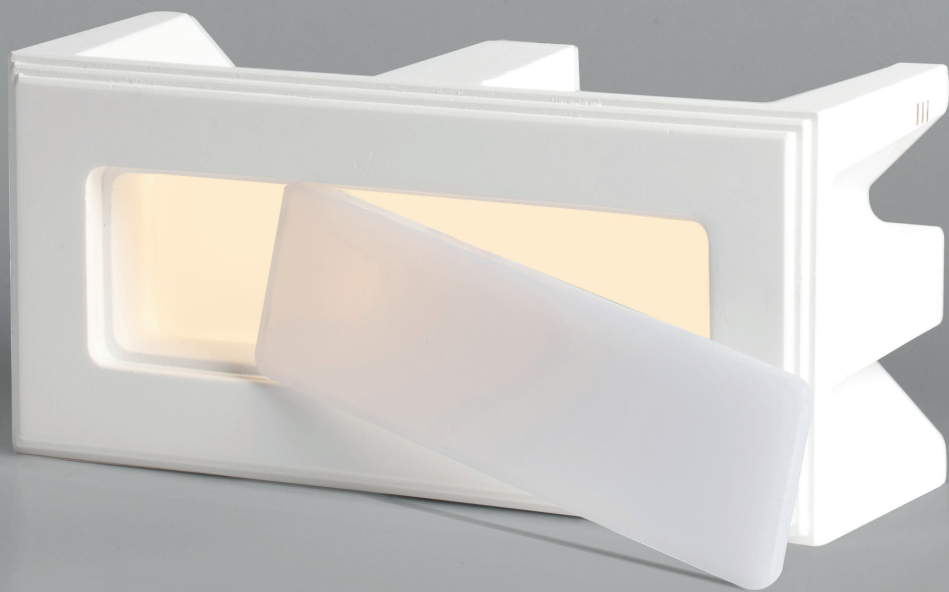

TECHNICAL DATA SHEET

BIBA IP20

INDOOR - INTERNO - INNENBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Fix (not adjustable) 0° - 0°

82x169 mm

Material : CALCYT® plaster and frosted diffuser


REMOTE LED DRIVER ON/OFF

REF N° 697 00 006 8W

REF N° 697 00 015 15W

REF N° 697 00 025 25W

230V/50Hz -  - current controlled
 -  - IP20 - 350mA - not dimmable

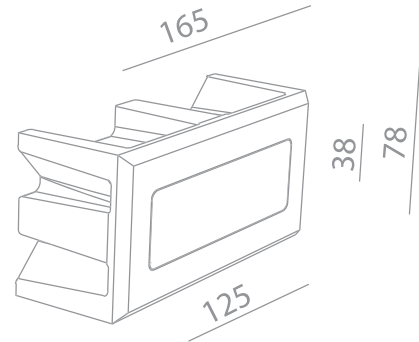

BIBA LED DIM 100 LM

REF N° 123 60 500 CRI 80 warm white 2200°K

REF N° 123 60 000 CRI 90 warm white 2700°K

REF N° 123 60 100 CRI 90 warm white 3000°K

REF N° 123 60 200 CRI 90 neutral white 4000°K

REF N° 123 60 300 royal blue

 - 1W - excl. LED driver - current controlled 350 mA -  -  - 
 -  - serial wiring - 3 Step MacAdam
Requires remote LED driver - 350 mA

REMOTE LED DRIVER DIM

REF N° 697 60 006 6W 1-10V

REF N° 697 60 015 15W 1-10V

REF N° 697 30 015 15W DALI

REF N° 697 60 025 25W 1-10V DALI PUSH

REF N° 697 60 040 40W 1-10V DALI PUSH

REF N° 697 70 009 9W PHASE DIM (tr. edge)

REF N° 697 70 017 17W PHASE DIM

230V/50Hz -  - current controlled
 -  - IP20 - 350mA - dimmable



Ready for installation in solid walls
Optional plasterkit for installation into gypsum walls

PLASTERKIT BIBA

REF N° 723 01 000 For mounting into gypsum walls
Housing: perforated aluminium

BIBA LED DIM 200 LM

REF N° 123 62 500 CRI 80 warm white 2200°K

REF N° 123 62 000 CRI 90 warm white 2700°K

REF N° 123 62 100 CRI 90 warm white 3000°K

REF N° 123 62 200 CRI 90 neutral white 4000°K

REF N° 123 62 300 royal blue

 - 2W - excl. LED driver - current controlled 350 mA -  -  - 
 -  - serial wiring - 3 Step MacAdam
Requires remote LED driver - 350 mA

BIBA LED DIM 400 LM

REF N° 123 61 500 CRI 80 warm white 2200°K


REF N° 123 61 000 CRI 90 warm white 2700°K

REF N° 123 61 100 CRI 90 warm white 3000°K

REF N° 123 61 200 CRI 90 neutral white 4000°K

REF N° 123 61 300 royal blue

 - 4W - excl. LED driver - current controlled 350 mA -  -  - 
 -  - serial wiring - 3 Step MacAdam
Requires remote LED driver - 350 mA

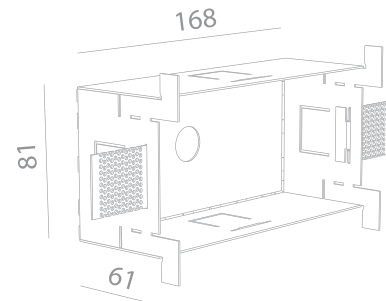



TECHNICAL DATA SHEET

BIBA IP54

OUTDOOR - ESTERNO - AUßENBEREICH - EXTERIEUR - EXTÉRIEUR - EXTERIOR

Fix (not adjustable) 0° - 0°

82x169 mm

Material : waterproof CALCYT+® and frosted diffuser

REMOTE LED DRIVER ON/OFF

REF N° 697 00 006 8W

REF N° 697 00 015 15W

REF N° 697 00 025 25W

230V/50Hz -  - current controlled
 -  - IP20 - 350mA - not dimmable

BIBA LED DIM 100 LM

REF N° 123 60 505 CRI 80 warm white 2200°K

REF N° 123 60 005 CRI 90 warm white 2700°K

REF N° 123 60 105 CRI 90 warm white 3000°K

REF N° 123 60 205 CRI 90 neutral white 4000°K

REF N° 123 60 305 royal blue

 - 1W - excl. LED driver - current controlled 350 mA -  -  - 
 -  - serial wiring - 3 Step MacAdam
Requires remote LED driver - 350 mA

REMOTE LED DRIVER DIM

REF N° 697 60 006 6W 1-10V

REF N° 697 60 015 15W 1-10V

REF N° 697 30 015 15W DALI

REF N° 697 60 025 25W 1-10V DALI PUSH

REF N° 697 60 040 40W 1-10V DALI PUSH

REF N° 697 70 009 9W PHASE DIM (tr. edge)

REF N° 697 70 017 17W PHASE DIM

230V/50Hz -  - current controlled
 -  - IP20 - 350mA - dimmable

BIBA LED DIM 200 LM

REF N° 123 62 505 CRI 80 warm white 2200°K

REF N° 123 62 005 CRI 90 warm white 2700°K

REF N° 123 62 105 CRI 90 warm white 3000°K

REF N° 123 62 205 CRI 90 neutral white 4000°K

REF N° 123 62 305 royal blue

 - 2W - excl. LED driver - current controlled 350 mA -  -  - 
 -  - serial wiring - 3 Step MacAdam
Requires remote LED driver - 350 mA

BIBA LED DIM 400 LM

REF N° 123 61 505 CRI 80 warm white 2200°K


REF N° 123 61 005 CRI 90 warm white 2700°K

REF N° 123 61 105 CRI 90 warm white 3000°K

REF N° 123 61 205 CRI 90 neutral white 4000°K

REF N° 123 61 305 royal blue

 - 4W - excl. LED driver - current controlled 350 mA -  -  - 
 -  - serial wiring - 3 Step MacAdam
Requires remote LED driver - 350 mA

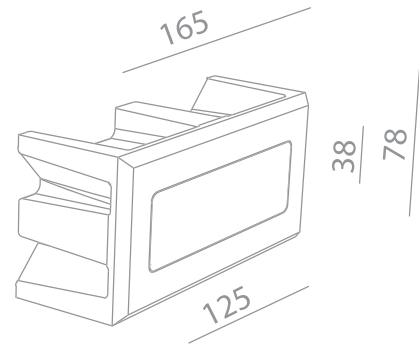

Ready for installation in solid walls
Optional plasterkit for installation into gypsum walls

PLASTERKIT BIBA

REF N° 723 01 000 For mounting into gypsum walls
Housing: perforated aluminium

