

TECHNICAL DATA SHEET

LEVEL R 50 IP54

OUTDOOR - ESTERNO - AUßENBEREICH - EXTERIEUR - EXTÉRIEUR - EXTERIOR

Fix (not adjustable) 0° - 0°

Ø120 mm

Material : waterproof CALCYT+®

LEVEL R 50 LED 500LM CRI 80 REMOTE DRIVER WARM DIM

WARM DIM : DIMS FROM 3000°K TO 2000°K

REF N° 272 29 645

6W - 500lm - 4 Step MacAdam

CE - ∇ - B - Excl. LED driver

Requires remote LED driver @ 350 mA

Standard beam angle 36° (options 24°)

h = 123 mm

LEVEL R 50 LED 700LM CRI 80 REMOTE DRIVER

REF N° 272 29 045 2700K

REF N° 272 29 145 3000K

REF N° 272 29 245 4000K

Xicato LED - 5,6W - 720lm - 2 Step MacAdam

CE - ∇ - A+ - Excl. LED driver

Requires remote LED driver @ 350 mA

Standard beam angle 36° (options 12°, 24°)

h = 123 mm

LEVEL R 50 HAL

REF N° 272 10 055

QR-CBC 51 - 50W - Gx5.3 - 12V

CE - ∇ - 0.5m - D

h = 123 mm - exclusive lamp and transfo

REMOTE LED DRIVER ON/OFF

REF N° 697 00 006 8W

REF N° 697 00 015 15W

REF N° 697 00 025 25W

230V/50Hz - □ - current controlled

∇ - CE - IP20 - 350mA - not dimmable

REMOTE LED DRIVER DIM

REF N° 697 60 006 6W 1-10V

REF N° 697 60 015 15W 1-10V

REF N° 697 30 015 15W DALI

REF N° 697 60 025 25W 1-10V DALI PUSH

REF N° 697 60 040 40W 1-10V DALI PUSH

REF N° 697 60 150 150W 1-10V

REF N° 697 30 150 150W DALI

REF N° 697 70 009 9W PHASE DIM (tr. edge)

REF N° 697 70 017 17W PHASE DIM

230V/50Hz - □ - current controlled

∇ - CE - IP20 - 350mA - dimmable



LEVEL R 50 ES

REF N° 272 11 055

QPAR 16 - 50W - GZ10/GU10 - □

CE - 230V/50Hz - ∇ - 0.5m - D

h = 123 mm - exclusive lamp

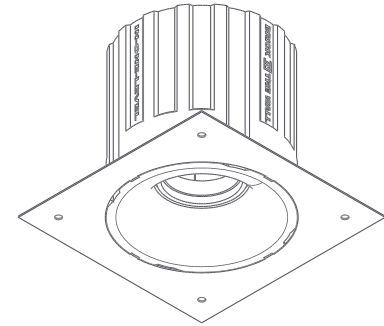

INSTALLATION KIT

STANDARD (included) installation system for concrete ceiling
height adjustable

BEAM ANGLES

STANDARD (included) beam angle 36°

REF N° 205 50 012 optional beam angle 12°

REF N° 205 50 024 optional beam angle 24°



TECHNICAL DATA SHEET

LEVEL 111 IP20

INDOOR - INTERNO - INNENBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Adjustable $\odot$ 0° - 30°

 325x325 mm

Material : CALCYT® plaster

LEVEL 111 LED 3000LM CRI 80

REF N°	2700°K	3000°K	4000°K
on/off	246 26 040	246 26 140	246 26 240
DIM 1-10V	246 66 040	246 66 140	246 66 240
DIM DALI	246 36 040	246 36 140	246 36 240

Xicato LED - 29,3 W - 3000lm - 2 Step MacAdam
 - 230V/50Hz -  -  -  - 
 Beam angle 36° (option 20°) - Incl LED driver
 h = 155 mm

LEVEL 111 LED 2000LM CRI 80

REF N°	2700°K	3000°K	4000°K
on/off	246 25 040	246 25 140	246 25 240
phase DIM	246 75 040	246 75 140	246 75 240
DIM 1-10V	246 65 040	246 65 140	246 65 240
DIM DALI	246 35 040	246 35 140	246 35 240

Xicato LED - 19,5 W - 2000lm - 2 Step MacAdam
 - 230V/50Hz -  -  -  - 
 Beam 36° (option 20°) - Incl LED driver
 h = 155 mm

LEVEL 111 LED 1300LM CRI 97

REF N°	2700°K	3000°K	4000°K
on/off	246 23 940	246 23 840	246 23 740
phase DIM	246 73 940	246 73 840	246 73 740
DIM 1-10V	246 63 940	246 63 840	246 63 740
DIM DALI	246 33 940	246 33 840	246 33 740

Xicato LED - 17,6 W - 1300lm - 2 Step MacAdam
 - 230V/50Hz -  -  -  - 
 Beam angle 36° (option 20°) - Incl LED driver
 h = 155 mm

LEVEL 111 LED 2000LM CRI 97

REF N°	2700°K	3000°K	4000°K
on/off	246 25 940	246 25 840	246 25 740
phase DIM	246 75 940	246 75 840	246 75 740
DIM 1-10V	246 65 940	246 65 840	246 65 740
DIM DALI	246 35 940	246 35 840	246 35 740

Xicato LED - 22,3 W - 2000lm - 2 Step MacAdam
 - 230V/50Hz -  -  -  - 
 Beam angle 36° (option 20°) - Incl LED driver
 h = 155 mm

LEVEL 111 AR

REF N° 246 13 100



 QR-LP 111 - 100W - G53 - 12V - 
 excl. transfo -  -  -   - 
 h = 111 mm

LEVEL 111 CDM

REF N° 246 19 070 CDM-TC - G8.5

REF N° 246 12 070 CDM-R - GX8.5

35W or 70W - 230V/50Hz -  - excl. EVG
 h = 148 mm -  -  -   - 




INSTALLATION KIT

STANDARD (included) installation system for ceiling 9 - 12 - 15 mm

REF N° 246 99 025 installation system for gypsum ceiling 25 mm

REF N° 246 99 030 installation system for gypsum ceiling 30 mm

REF N° 848 00 000 Concrete box Level 111 - Galvanized steel



BEAM ANGLES & OPTIONS

STANDARD (included) beam angle 36°

REF N° 205 11 020 optional beam angle 20°

REF N° 201 00 060 Frosted diffuser for 111 LED series

EMERGENCY UNITS

REF N° 693 01 001 1h basic + control LED

REF N° 693 01 003 3h basic + control LED

REF N° 693 30 001 1h EMPRO DALI

REF N° 693 30 003 3h EMPRO DALI



TECHNICAL DATA SHEET

LEVEL 50 IP54

BATHROOM - STANZA DA BAGNO - BADEZIMMER - BADKAMER - SALLE DE BAINS - CUARTO DE BAÑO

Fix (not adjustable) 0° - 0°

194x194 mm

Material : CALCYT® plaster

LEVEL 50 LED WARMDIM

WARMDIM : DIMS FROM 3000°K TO 2000°K

REF N°	500LM CRI80	900LM CRI90
phase DIM	245 72 641	245 73 641
DIM 1-10V	245 62 641	245 63 641
DIM DALI	245 32 641	245 33 641

6 W (500lm) - 12,8 W (900lm) - 4 Step MacAdam
 ☐ - 230V/50Hz - ☑ - ☐ - ☐ - ☐
 Incl. LED driver (phase DIM, 1-10V or DALI)
 Standard beam angle 36° (options 24°)
 h = 115 mm (500lm) - h = 150 mm (900lm)

LEVEL 50 LED 1300LM CRI 80

REF N°	2700°K	3000°K	4000°K
phase DIM	245 73 041	245 73 141	245 73 241
DIM 1-10V	245 63 041	245 63 141	245 63 241
DIM DALI	245 33 041	245 33 141	245 33 241

Xicato LED - 11,7 W - 1300lm - 2 Step MacAdam
 ☐ - 230V/50Hz - ☑ - ☐ - ☐ - ☐
 Incl. LED driver (phase DIM, 1-10V or DALI)
 Standard beam angle 36° (options 12°, 24°)
 h = 150 mm

LEVEL 50 LED 700LM CRI 80

REF N°	2700°K	3000°K	4000°K
phase DIM	245 72 041	245 72 141	245 72 241
DIM 1-10V	245 62 041	245 62 141	245 62 241
DIM DALI	245 32 041	245 32 141	245 32 241

Xicato LED - 5,6 W - 720lm - 2 Step MacAdam
 ☐ - 230V/50Hz - ☑ - ☐ - ☐ - ☐
 Incl. LED driver (phase DIM, 1-10V or DALI)
 Standard beam angle 36° (options 12°, 24°)
 h = 92 mm (phase DIM models beam 36°)
 h = 115 mm (all other models)

LEVEL 50 LED 700LM CRI 97

REF N°	2700°K	3000°K	4000°K
phase DIM	245 72 941	245 72 841	245 72 741
DIM 1-10V	245 62 941	245 62 841	245 62 741
DIM DALI	245 32 941	245 32 841	245 32 741

Xicato LED - 7,4 W - 720lm - 2 Step MacAdam
 ☐ - 230V/50Hz - ☑ - ☐ - ☐ - ☐
 Incl. LED driver (phase DIM, 1-10V or DALI)
 Standard beam angle 36° (options 12°, 24°)
 h = 115 mm (models beam angle 36°)
 h = 150 mm (models beam angle 12° or 24°)

LEVEL 50 HAL


REF N° 245 10 051

☐ QR-CBC 51 - 50W - Gx5.3 - 12V
 ☐ - ☑ - ☐ - ☐ - ☐ - ☐
 h = 92 mm - exclusive lamp and transfo

LEVEL 50 ES


REF N° 245 11 051

☐ QPAR 16 - 50W - GZ10/GU10 - ☐
 ☐ - ☑ - 230V/50Hz - ☐ - ☐ - ☐
 h = 93 mm - exclusive lamp

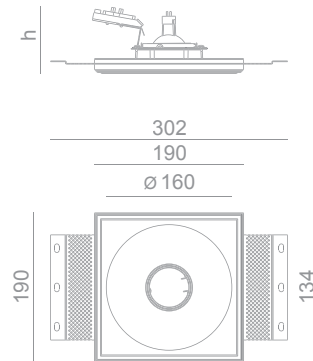

INSTALLATION KIT

STANDARD (included) installation system for ceiling 9 - 12 - 15 mm
REF N° 245 99 025 installation system for gypsum ceiling 25 mm
REF N° 245 99 030 installation system for gypsum ceiling 30 mm
REF N° 847 00 000 Concrete box Level 50 - Galvanized steel



BEAM ANGLES

STANDARD (included) beam angle 36°
REF N° 205 50 012 optional beam angle 12°
REF N° 205 50 024 optional beam angle 24°

EMERGENCY UNITS

REF N° 693 01 001 1h basic + control LED
REF N° 693 01 003 3h basic + control LED
REF N° 693 30 001 1h EMPRO DALI
REF N° 693 30 003 3h EMPRO DALI



TECHNICAL DATA SHEET

LEVEL 50 IP54

OUTDOOR - ESTERNO - AUßENBEREICH - EXTERIEUR - EXTERIOR

Fix (not adjustable) 0° - 0°

194x194 mm

Material : waterproof CALCYT+®

LEVEL 50 LED WARMDIM

WARMDIM : DIMS FROM 3000°K TO 2000°K

REF N°	500LM CRI80	900LM CRI90
phase DIM	245 72 645	245 73 645
DIM 1-10V	245 62 645	245 63 645
DIM DALI	245 32 645	245 33 645

6W (500lm) - 12,8W (900lm) - 4 Step MacAdam
 ☐ - 230V/50Hz - ☑ - ☐ - ☐ - ☐
 Incl. LED driver (phase DIM, 1-10V or DALI)
 Standard beam angle 36° (options 24°)
 h = 115 mm (500lm) - h = 150 mm (900lm)

LEVEL 50 LED 1300LM CRI 80

REF N°	2700°K	3000°K	4000°K
phase DIM	245 73 045	245 73 145	245 73 245
DIM 1-10V	245 63 045	245 63 145	245 63 245
DIM DALI	245 33 045	245 33 145	245 33 245

Xicato LED - 11,7W - 1300lm - 2 Step MacAdam
 ☐ - 230V/50Hz - ☑ - ☐ - ☐ - ☐
 Incl. LED driver (phase DIM, 1-10V or DALI)
 Standard beam angle 36° (options 12°, 24°)
 h = 150 mm

LEVEL 50 LED 700LM CRI 80

REF N°	2700°K	3000°K	4000°K
phase DIM	245 72 045	245 72 145	245 72 245
DIM 1-10V	245 62 045	245 62 145	245 62 245
DIM DALI	245 32 045	245 32 145	245 32 245

Xicato LED - 5,6 W - 720lm - 2 Step MacAdam
 ☐ - 230V/50Hz - ☑ - ☐ - ☐ - ☐
 Incl. LED driver (phase DIM, 1-10V or DALI)
 Standard beam angle 36° (options 12°, 24°)
 h = 92 mm (phase DIM models beam 36°)
 h = 115 mm (all other models)

LEVEL 50 LED 700LM CRI 97

REF N°	2700°K	3000°K	4000°K
phase DIM	245 72 945	245 72 845	245 72 745
DIM 1-10V	245 62 945	245 62 845	245 62 745
DIM DALI	245 32 945	245 32 845	245 32 745

Xicato LED - 7,4 W - 720lm - 2 Step MacAdam
 ☐ - 230V/50Hz - ☑ - ☐ - ☐ - ☐
 Incl. LED driver (phase DIM, 1-10V or DALI)
 Standard beam angle 36° (options 12°, 24°)
 h = 115 mm (models beam angle 36°)
 h = 150 mm (models beam angle 12° or 24°)

LEVEL 50 HAL


REF N° 245 10 055

☐ QR-CBC 51 - 50W - Gx5.3 - 12V
 ☐ - ☑ - ☐ - ☐ - ☐ - ☐
 h = 92 mm - exclusive lamp and transfo

LEVEL 50 ES


REF N° 245 11 055

☐ QPAR 16 - 50W - GZ10/GU10 - ☐
 ☐ - ☑ - 230V/50Hz - ☐ - ☐ - ☐
 h = 93 mm - exclusive lamp

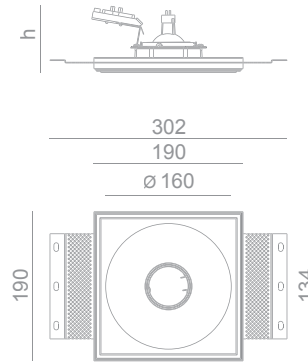

INSTALLATION KIT

STANDARD (included) installation system for ceiling 9 - 12 - 15 mm
REF N° 245 99 025 installation system for gypsum ceiling 25 mm
REF N° 245 99 030 installation system for gypsum ceiling 30 mm
REF N° 847 00 000 Concrete box Level 50 - Galvanized steel



BEAM ANGLES

STANDARD (included) beam angle 36°
REF N° 205 50 012 optional beam angle 12°
REF N° 205 50 024 optional beam angle 24°

EMERGENCY UNITS

REF N° 693 01 001 1h basic + control LED
REF N° 693 01 003 3h basic + control LED
REF N° 693 30 001 1h EMPRO DALI
REF N° 693 30 003 3h EMPRO DALI

TECHNICAL DATA SHEET

LEVEL 50 IP20

INDOOR - INTERNO - INNENBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Adjustable ϕ 0° - 30°

194x194 mm

Material : CALCYT® plaster

LEVEL 50 LED WARMDIM

WARMDIM : DIMS FROM 3000°K TO 2000°K

REF N°	500LM CRI80	900LM CRI90
phase DIM	245 72 640	245 73 640
DIM 1-10V	245 62 640	245 63 640
DIM DALI	245 32 640	245 33 640

6 W (500lm) - 12,8 W (900lm) - 4 Step MacAdam
 $\square$ - 230V/50Hz - CE - ∇ - A - B
 Incl. LED driver (phase DIM, 1-10V or DALI)
 Standard beam angle 36° (options 24°)
 h = 115 mm (500lm) - h = 150 mm (900lm)

LEVEL 50 LED 1300LM CRI 80

REF N°	2700°K	3000°K	4000°K
phase DIM	245 73 040	245 73 140	245 73 240
DIM 1-10V	245 63 040	245 63 140	245 63 240
DIM DALI	245 33 040	245 33 140	245 33 240

Xicato LED - 11,7 W - 1300lm - 2 Step MacAdam
 $\square$ - 230V/50Hz - CE - ∇ - A
 Incl. LED driver (phase DIM, 1-10V or DALI)
 Standard beam angle 36° (options 12°, 24°)
 h = 150 mm

LEVEL 50 LED 700LM CRI 80

REF N°	2700°K	3000°K	4000°K
phase DIM	245 72 040	245 72 140	245 72 240
DIM 1-10V	245 62 040	245 62 140	245 62 240
DIM DALI	245 32 040	245 32 140	245 32 240

Xicato LED - 5,6 W - 720lm - 2 Step MacAdam
 $\square$ - 230V/50Hz - CE - ∇ - A - A^+
 Incl. LED driver (phase DIM, 1-10V or DALI)
 Standard beam angle 36° (options 12°, 24°)
 h = 92 mm (phase DIM models beam 36°)
 h = 115 mm (all other models)

LEVEL 50 LED 700LM CRI 97

REF N°	2700°K	3000°K	4000°K
phase DIM	245 72 940	245 72 840	245 72 740
DIM 1-10V	245 62 940	245 62 840	245 62 740
DIM DALI	245 32 940	245 32 840	245 32 740

Xicato LED - 7,4 W - 720lm - 2 Step MacAdam
 $\square$ - 230V/50Hz - CE - ∇ - A - A^+
 Incl. LED driver (phase DIM, 1-10V or DALI)
 Standard beam angle 36° (options 12°, 24°)
 h = 115 mm (models beam angle 36°)
 h = 150 mm (models beam angle 12° or 24°)

LEVEL 50 HAL


REF N° 245 10 050

$\square$ QR-CBC 51 - 50W - Gx5.3 - 12V
 $\diamond$ - CE - A - ∇ - C - 0.5m - D
 h = 92 mm - exclusive lamp and transfo

LEVEL 50 ES

REF N° 245 11 050

$\square$ QPAR 16 - 50W - GZ10/GU10 - A
 $\diamond$ - CE - 230V/50Hz - ∇ - C - 0.5m - D
 h = 93 mm - exclusive lamp

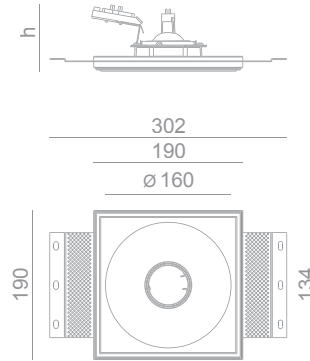


INSTALLATION KIT

STANDARD (included) installation system for ceiling 9 - 12 - 15 mm

REF N° 245 99 025 installation system for gypsum ceiling 25 mm

REF N° 245 99 030 installation system for gypsum ceiling 30 mm

REF N° 847 00 000 Concrete box Level 50 - Galvanized steel



BEAM ANGLES

STANDARD (included) beam angle 36°

REF N° 205 50 012 optional beam angle 12°

REF N° 205 50 024 optional beam angle 24°

EMERGENCY UNITS

REF N° 693 01 001 1h basic + control LED

REF N° 693 01 003 3h basic + control LED

REF N° 693 30 001 1h EMPRO DALI

REF N° 693 30 003 3h EMPRO DALI

LEVEL 50 IP20

ACCESSORIES - ACCESSORI - ZUBEHÖR - ACCESSOIRES - ACCESORIOS



STANDARD (included) LAMPHOLDER RING WHITE



REF N° 201 10 002 LAMPHOLDER RING BLACK



REF N° 201 11 001
EXTENSION S WHITE
Ø 56 x 26 mm $\odot$ 0° - 10°



REF N° 201 12 001
EXTENSION M WHITE
Ø 56 x 36 mm $\odot$ 0° - 10°



REF N° 201 13 001
EXTENSION L WHITE
Ø 56 x 68 mm $\odot$ 0° - 10°



REF N° 201 11 002
EXTENSION S BLACK
Ø 56 x 26 mm $\odot$ 0° - 10°



REF N° 201 12 002
EXTENSION M BLACK
Ø 56 x 36 mm $\odot$ 0° - 10°



REF N° 201 13 002
EXTENSION L BLACK
Ø 56 x 68 mm $\odot$ 0° - 10°



REF N° 201 51 001
FROSTED PLEXI WHITE
Only for LED lampsources



REF N° 201 52 001
HONEYCOMB WHITE
Only for LED lampsources



REF N° 201 53 001
SPHERICAL GLASS LENS
IN WHITE RING



REF N° 201 51 002
FROSTED PLEXI BLACK
Only for LED lampsources



REF N° 201 52 002
HONEYCOMB BLACK
Only for LED lampsources



REF N° 201 53 002
SPHERICAL GLASS LENS
IN BLACK RING