

TECHNICAL DATA SHEET


NORMALL S IP20

INDOOR - INTERNO - INNENBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Fix (not adjustable) 0° - 0°

225x380 mm

Material : CALCYT® plaster

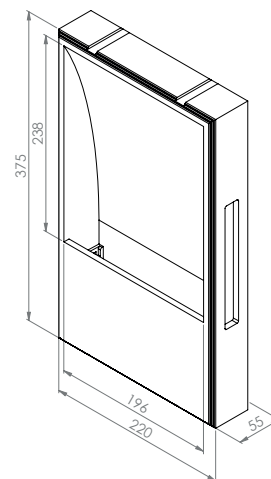

NORMALL S LED WARMDIM 900LM 230VAC

WARMDIM : DIMS FROM 3000°K TO 2000°K

REF N° 115 73 600 phase DIM

REF N° 115 63 600 DIM 1-10V

REF N° 115 33 600 DIM DALI

230V/50Hz - 12,8W - incl. line voltage driver

◊ - parallel wiring ▽ 0.2m E CE - P -

4 Step MacAdam - CRI 90 - B

NORMALL S LED 800LM 230VAC

REF N°	2200°K	2700°K	3000°K
phase DIM	115 71 500	115 71 000	115 71 100
DIM 1-10V	115 61 500	115 61 000	115 61 100
DIM DALI	115 31 500	115 31 000	115 31 100

230V/50Hz - 9,3W - incl. line voltage driver

◊ - parallel wiring ▽ 0.2m E CE - P -

2 Step MacAdam - CRI 90 - R9=75 - A

NORMALL S LED 1000LM 230VAC

REF N°	2700°K	3000°K	4000°K
phase DIM	115 72 000	115 72 100	115 72 200
DIM 1-10V	115 62 000	115 62 100	115 62 200
DIM DALI	115 32 000	115 32 100	115 32 200

230V/50Hz - 11W - incl. line voltage driver

◊ - parallel wiring ▽ 0.2m E CE - P -

2 Step MacAdam - CRI 90 - R9=75 - A

NORMALL S LED 2000LM 230VAC

REF N°	2700°K	3000°K	4000°K
phase DIM	115 74 000	115 74 100	115 74 200
DIM 1-10V	115 64 000	115 64 100	115 64 200
DIM DALI	115 34 000	115 34 100	115 34 200

230V/50Hz - 14,1W - incl. line voltage driver

◊ - parallel wiring ▽ 0.2m E CE - P -

2 Step MacAdam - CRI 80 - A+

Ready for installation in solid walls
Optional plasterkit for installation into gypsum walls

PLASTERKIT NORMALL S

REF N° 715 01 000 For mounting into gypsum walls



TECHNICAL DATA SHEET

NORMALL IP54


BATHROOM - STANZA DA BAGNO - BADEZIMMER - BADKAMER - SALLE DE BAINS - CUARTO DE BAÑO

Fix (not adjustable) 0° - 0°

225x365 mm


Material : CALCYT® plaster

NORMALL LED 800LM 230VAC			
REF N°	2200°K	2700°K	3000°K
phase DIM	105 71 501	105 71 001	105 71 101
230V/50Hz - 9,3W - incl. line voltage driver ◊ - parallel wiring ▽ Q0.2m ■ B-CE - © - 2 Step MacAdam - CRI 90 - R9=75 - A			

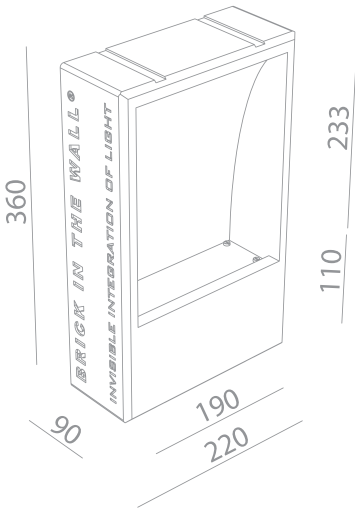

Ready for installation in solid walls
Optional plasterkit for installation into gypsum walls

PLASTERKIT NORMALL
REF N° 705 01 000 For mounting into gypsum walls

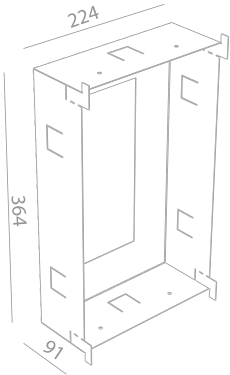

TECHNICAL DATA SHEET

NORMALL IP54


OUTDOOR - ESTERNO - AUßENBEREICH - EXTERIEUR - EXTÉRIEUR - EXTERIOR

Fix (not adjustable) 0° - 0°

225x365 mm

Material : waterproof CALCYT+®


NORMALL LED 800LM 230VAC			
REF N°	2200°K	2700°K	3000°K
phase DIM	105 71 505	105 71 005	105 71 105
230V/50Hz - 9,3W - incl. line voltage driver ◊ - parallel wiring ▽ Q0.2m ■ B-CE - © - 2 Step MacAdam - CRI 90 - R9=75 - A			

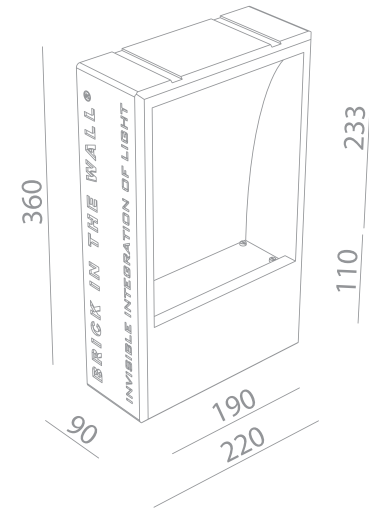

Ready for installation in solid walls
Optional plasterkit for installation into gypsum walls

PLASTERKIT NORMALL

REF N° 705 01 000 For mounting into gypsum walls

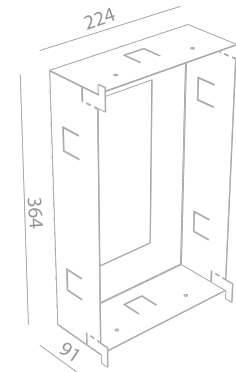

TECHNICAL DATA SHEET


NORMALL IP20

INDOOR - INTERNO - INNENBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Fix (not adjustable) 0° - 0°

225x365 mm

Material : CALCYT® plaster

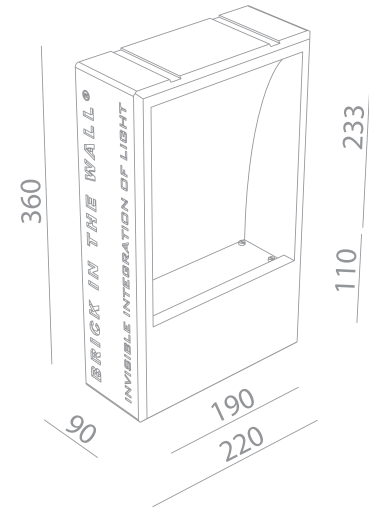

NORMALL LED WARMDIM 900LM 230VAC

WARMDIM : DIMS FROM 3000°K TO 2000°K

REF N° 105 73 600 phase DIM

REF N° 105 63 600 DIM 1-10V

REF N° 105 33 600 DIM DALI

230V/50Hz - 12,8W - incl. line voltage driver

◊ - parallel wiring ▽ 0.2m F-CE-® -

4 Step MacAdam - CRI 90 - B

NORMALL LED 800LM 230VAC

REF N°	2200°K	2700°K	3000°K
phase DIM	105 71 500	105 71 000	105 71 100
DIM 1-10V	105 61 500	105 61 000	105 61 100
DIM DALI	105 31 500	105 31 000	105 31 100

230V/50Hz - 9,3W - incl. line voltage driver

◊ - parallel wiring ▽ 0.2m F-CE-® -

2 Step MacAdam - CRI 90 - R9=75 - A

NORMALL LED 1000LM 230VAC

REF N°	2700°K	3000°K	4000°K
phase DIM	105 72 000	105 72 100	105 72 200
DIM 1-10V	105 62 000	105 62 100	105 62 200
DIM DALI	105 32 000	105 32 100	105 32 200

230V/50Hz - 11W - incl. line voltage driver

◊ - parallel wiring ▽ 0.2m F-CE-® -

2 Step MacAdam - CRI 90 - R9=75 - A

NORMALL LED 2000LM 230VAC

REF N°	2700°K	3000°K	4000°K
phase DIM	105 74 000	105 74 100	105 74 200
DIM 1-10V	105 64 000	105 64 100	105 64 200
DIM DALI	105 34 000	105 34 100	105 34 200

230V/50Hz - 14,1W - incl. line voltage driver

◊ - parallel wiring ▽ 0.2m F-CE-® -

2 Step MacAdam - CRI 80 - A+

NORMALL HAL

REF N° 105 01 060

QT-DE - max 60 W - R7s (74.5mm)

230V/50Hz - ◊ - ▽ 0.5m F-CE-® - D

NORMALL FLUO

REF N° 105 01 026

TC-DEL 26W - G24q-3 - 230V/50Hz

◊ - incl. EVG - ▽ 0.5m F-CE-® -

Ready for installation in solid walls
Optional plasterkit for installation into gypsum walls

PLASTERKIT NORMALL

REF N° 705 01 000 For mounting into gypsum walls

