

TECHNICAL DATA SHEET




ZERODIX 111 IP54

BATHROOM - STANZA DA BAGNO - BADEZIMMER - BADKAMER - SALLE DE BAINS - CUARTO DE BAÑO

Fix (not adjustable) 0° - 0°


204x204 mm

Material : CALCYT® plaster and frosted diffuser

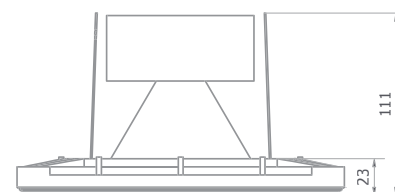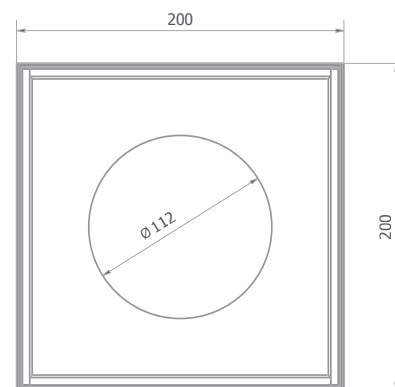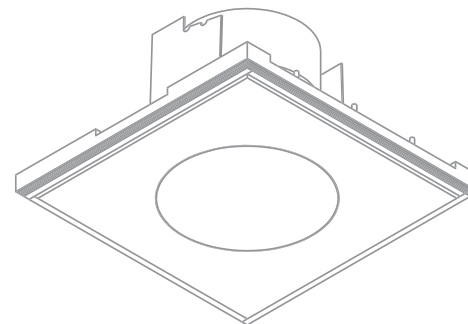


ZERODIX 111 LED 3000LM CRI 80

REF N°	2700°K	3000°K	4000°K
on/off	266 26 061	266 26 161	266 26 261
phase DIM	266 66 061	266 66 161	266 66 261
DIM 1-10V	266 36 061	266 36 161	266 36 261

Xicato LED - 29,3W - 3000lm - 2 Step MacAdam
 - 230V/50Hz - **CE** - **A**
 Beam angle 60° - Incl LED driver
 h = 140 mm


ZERODIX 111 LED 2000LM CRI 80

REF N°	2700°K	3000°K	4000°K
on/off	266 25 061	266 25 161	266 25 261
phase DIM	266 75 061	266 75 161	266 75 261
DIM 1-10V	266 65 061	266 65 161	266 65 261
DIM DALI	266 35 061	266 35 161	266 35 261

Xicato LED - 19,5W - 2000lm - 2 Step MacAdam
 - 230V/50Hz - **CE** - **A**
 Beam angle 60° - Incl LED driver
 h = 140 mm


ZERODIX 111 LED 1300LM CRI 97

REF N°	2700°K	3000°K	4000°K
on/off	266 23 961	266 23 861	266 23 761
phase DIM	266 73 961	266 73 861	266 73 761
DIM 1-10V	266 63 961	266 63 861	266 63 761
DIM DALI	266 33 961	266 33 861	266 33 761

Xicato LED - 17,6W - 1300lm - 2 Step MacAdam
 - 230V/50Hz - **CE** - **A**
 Beam angle 60° - Incl LED driver
 h = 140 mm

ZERODIX 111 LED 2000LM CRI 97

REF N°	2700°K	3000°K	4000°K
on/off	266 25 961	266 25 861	266 25 761
phase DIM	266 75 961	266 75 861	266 75 761
DIM 1-10V	266 65 961	266 65 861	266 65 761
DIM DALI	266 35 961	266 35 861	266 35 761

Xicato LED - 22,3W - 2000lm - 2 Step MacAdam
 - 230V/50Hz - **CE** - **A**
 Beam angle 60° - Incl LED driver
 h = 140 mm

INSTALLATION KIT

STANDARD (included) installation system for ceiling 9 - 12 - 15 mm

REF N° 266 99 025 installation system for gypsum ceiling 25 mm

REF N° 266 99 030 installation system for gypsum ceiling 30 mm

TECHNICAL DATA SHEET




ZERODIX 111 IP54

OUTDOOR - ESTERNO - AUßENBEREICH - EXTERIEUR - EXTÉRIEUR - EXTERIOR

Fix (not adjustable) 0° - 0°

□ 204x204 mm

Material : waterproof CALCYT+® and frosted diffusor

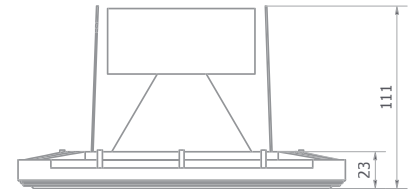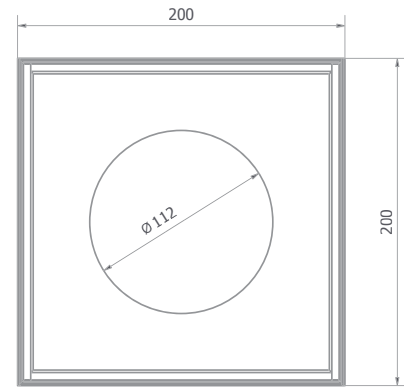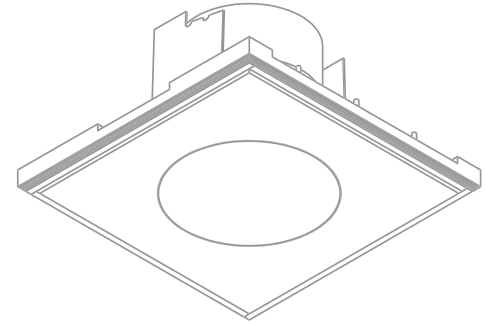

ZERODIX 111 LED 3000LM CRI 80

REF N°	2700°K	3000°K	4000°K
on/off	266 26 065	266 26 165	266 26 265
DIM 1-10V	266 66 065	266 66 165	266 66 265
DIM DALI	266 36 065	266 36 165	266 36 265

Xicato LED - 29,3W - 3000lm - 2 Step MacAdam
 □ - 230V/50Hz - **CE** - **A**
 Beam angle 60° - Incl LED driver
 h = 140 mm

ZERODIX 111 LED 2000LM CRI 80

REF N°	2700°K	3000°K	4000°K
on/off	266 25 065	266 25 165	266 25 265
phase DIM	266 75 065	266 75 165	266 75 265
DIM 1-10V	266 65 065	266 65 165	266 65 265
DIM DALI	266 35 065	266 35 165	266 35 265

Xicato LED - 19,5W - 2000lm - 2 Step MacAdam
 □ - 230V/50Hz - **CE** - **A**
 Beam angle 60° - Incl LED driver
 h = 140 mm

ZERODIX 111 LED 1300LM CRI 97

REF N°	2700°K	3000°K	4000°K
on/off	266 23 965	266 23 865	266 23 765
phase DIM	266 73 965	266 73 865	266 73 765
DIM 1-10V	266 63 965	266 63 865	266 63 765
DIM DALI	266 33 965	266 33 865	266 33 765

Xicato LED - 17,6W - 1300lm - 2 Step MacAdam
 □ - 230V/50Hz - **CE** - **A**
 Beam angle 60° - Incl LED driver
 h = 140 mm

ZERODIX 111 LED 2000LM CRI 97

REF N°	2700°K	3000°K	4000°K
on/off	266 25 965	266 25 865	266 25 765
phase DIM	266 75 965	266 75 865	266 75 765
DIM 1-10V	266 65 965	266 65 865	266 65 765
DIM DALI	266 35 965	266 35 865	266 35 765

Xicato LED - 22,3W - 2000lm - 2 Step MacAdam
 □ - 230V/50Hz - **CE** - **A**
 Beam angle 60° - Incl LED driver
 h = 140 mm

INSTALLATION KIT

STANDARD (included) installation system for ceiling 9 - 12 - 15 mm

REF N° 266 99 025 installation system for gypsum ceiling 25 mm

REF N° 266 99 030 installation system for gypsum ceiling 30 mm



TECHNICAL DATA SHEET



ZERODIX 111 IP20

INDOOR - INTERNO - INNENBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Fix (not adjustable) 0° - 0°

□ 204x204 mm

Material : CALCYT® plaster and frosted diffuser

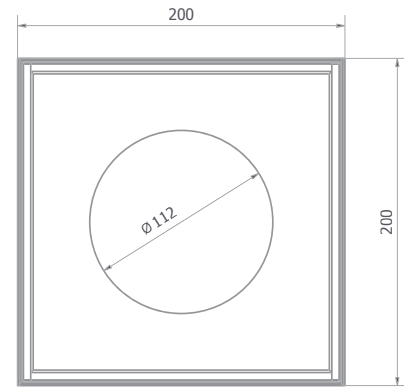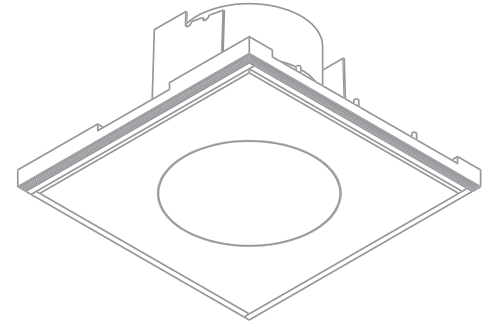

ZERODIX 111 LED 3000LM CRI 80			
REF N°	2700°K	3000°K	4000°K
on/off	266 26 060	266 26 160	266 26 260
phase DIM	266 66 060	266 66 160	266 66 260
DIM 1-10V	266 66 060	266 66 160	266 66 260
DIM DALI	266 36 060	266 36 160	266 36 260

Xicato LED - 29,3W - 3000lm - 2 Step MacAdam
 □ - 230V/50Hz - **CE** - **∇** - **⚡** - **A**
 Beam angle 60° - Incl LED driver
 h = 140 mm

ZERODIX 111 LED 2000LM CRI 80			
REF N°	2700°K	3000°K	4000°K
on/off	266 25 060	266 25 160	266 25 260
phase DIM	266 75 060	266 75 160	266 75 260
DIM 1-10V	266 65 060	266 65 160	266 65 260
DIM DALI	266 35 060	266 35 160	266 35 260


Xicato LED - 19,5W - 2000lm - 2 Step MacAdam
 □ - 230V/50Hz - **CE** - **∇** - **⚡** - **A**
 Beam angle 60° - Incl LED driver
 h = 140 mm

ZERODIX 111 LED 1300LM CRI 97			
REF N°	2700°K	3000°K	4000°K
on/off	266 23 960	266 23 860	266 23 760
phase DIM	266 73 960	266 73 860	266 73 760
DIM 1-10V	266 63 960	266 63 860	266 63 760
DIM DALI	266 33 960	266 33 860	266 33 760

Xicato LED - 17,6W - 1300lm - 2 Step MacAdam
 □ - 230V/50Hz - **CE** - **∇** - **⚡** - **A**
 Beam angle 60° - Incl LED driver
 h = 140 mm

ZERODIX 111 LED 2000LM CRI 97			
REF N°	2700°K	3000°K	4000°K
on/off	266 25 960	266 25 860	266 25 760
phase DIM	266 75 960	266 75 860	266 75 760
DIM 1-10V	266 65 960	266 65 860	266 65 760
DIM DALI	266 35 960	266 35 860	266 35 760

Xicato LED - 22,3W - 2000lm - 2 Step MacAdam
 □ - 230V/50Hz - **CE** - **∇** - **⚡** - **A**
 Beam angle 60° - Incl LED driver
 h = 140 mm

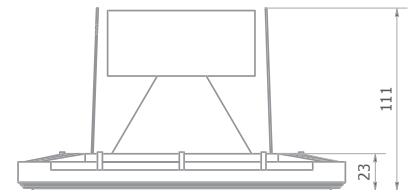

INSTALLATION KIT

STANDARD (included) installation system for ceiling 9 - 12 - 15 mm

REF N° 266 99 025 installation system for gypsum ceiling 25 mm

REF N° 266 99 030 installation system for gypsum ceiling 30 mm

TECHNICAL DATA SHEET




ZERODIX 140 IP54

BATHROOM - STANZA DA BAGNO - BADEZIMMER - BADKAMER - SALLE DE BAINS - CUARTO DE BAÑO

Fix (not adjustable) 0° - 0°

□ 204x204 mm

Material : CALCYT® plaster and frosted diffuser

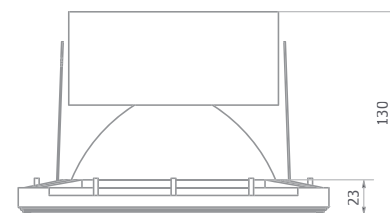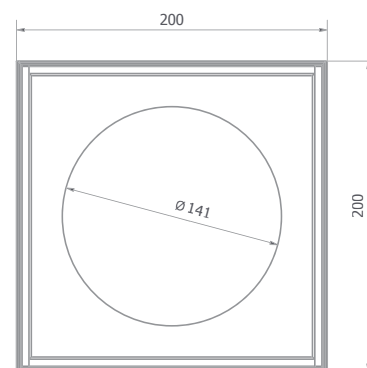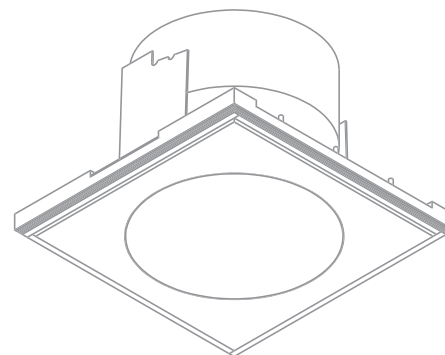

INSTALLATION KIT

STANDARD (included) installation system for ceiling 9 - 12 - 15 mm

REF N° 264 99 025 installation system for gypsum ceiling 25 mm

REF N° 264 99 030 installation system for gypsum ceiling 30 mm

ZERODIX 140 LED 2000LM CRI 97

REF N°	2700°K	3000°K	4000°K
on/off	264 25 991	264 25 891	264 25 791
DIM 1-10V	264 65 991	264 65 891	264 65 791
DIM DALI	264 35 991	264 35 891	264 35 791

Xicato LED - 29,3W - 2000lm @ 70°C
 □ - 230V/50Hz ⚡ - incl LED driver - Beam angle 90° - ▽ - IP20 Ⓡ0.5m - ⚡ CE - 850°C
 2 SDCM - h=135 - □ 204x204 mm

ZERODIX 140 LED 4000LM CRI 80

REF N°	2700°K	3000°K	4000°K
on/off	264 27 091	264 27 191	264 27 291
DIM 1-10V	264 67 091	264 67 191	264 67 291
DIM DALI	264 37 091	264 37 191	264 37 291

Xicato LED - 34,1W - 3850lm @ 70°C
 □ - 230V/50Hz ⚡ - incl LED driver - Beam angle 90° - ▽ - IP20 Ⓡ0.5m - ⚡ CE - 850°C
 2 SDCM - h=135 - □ 204x204 mm

ZERODIX 140 LED 2000LM CRI 80

REF N°	2700°K	3000°K	4000°K
on/off	264 25 091	264 25 191	264 25 291
DIM 1-10V	264 65 091	264 65 191	264 65 291
DIM DALI	264 35 091	264 35 191	264 35 291

Xicato LED - 19,5W - 2000lm @ 70°C
 □ - 230V/50Hz ⚡ - incl LED driver - Beam angle 90° - ▽ - IP20 Ⓡ0.5m - ⚡ CE - 850°C
 2 SDCM - h=135 - □ 204x204 mm

ZERODIX 140 LED 3000LM CRI 80

REF N°	2700°K	3000°K	4000°K
on/off	264 26 091	264 26 191	264 26 291
DIM 1-10V	264 66 091	264 66 191	264 66 291
DIM DALI	264 36 091	264 36 191	264 36 291

Xicato LED - 29,3W - 3000lm @ 70°C
 □ - 230V/50Hz ⚡ - incl LED driver - Beam angle 90° - ▽ - IP20 Ⓡ0.5m - ⚡ CE - 850°C
 2 SDCM - h=135 - □ 204x204 mm

TECHNICAL DATA SHEET




ZERODIX 140 IP54

OUTDOOR - ESTERNO - AUßENBEREICH - EXTERIEUR - EXTÉRIEUR - EXTERIOR

Fix (not adjustable) 0° - 0°

□ 204x204 mm

Material : waterproof CALCYT+® and frosted diffusor

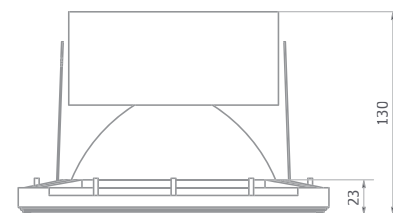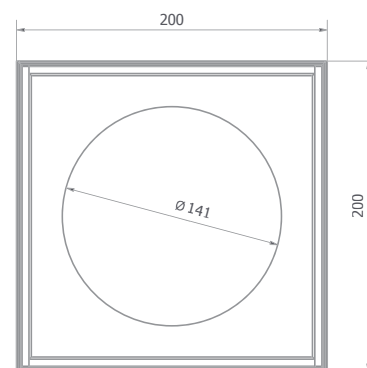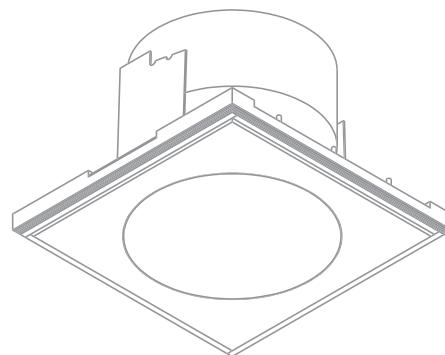

INSTALLATION KIT

STANDARD (included) installation system for ceiling 9 - 12 - 15 mm

REF N° 264 99 025 installation system for gypsum ceiling 25 mm

REF N° 264 99 030 installation system for gypsum ceiling 30 mm

ZERODIX 140 LED 2000LM CRI 97

REF N°	2700°K	3000°K	4000°K
on/off	264 25 995	264 25 895	264 25 795
DIM 1-10V	264 65 995	264 65 895	264 65 795
DIM DALI	264 35 995	264 35 895	264 35 795

Xicato LED - 29,3W - 2000lm @ 70°C
 □ - 230V/50Hz ⚡ - incl LED driver - Beam angle 90° - ▽ - IP20 ⚡ - 850°C
 2 SDCM - h=135 - □ 204x204 mm

ZERODIX 140 LED 4000LM CRI 80

REF N°	2700°K	3000°K	4000°K
on/off	264 27 095	264 27 195	264 27 295
DIM 1-10V	264 67 095	264 67 195	264 67 295
DIM DALI	264 37 095	264 37 195	264 37 295

Xicato LED - 34,1W - 3850lm @ 70°C
 □ - 230V/50Hz ⚡ - incl LED driver - Beam angle 90° - ▽ - IP20 ⚡ - 850°C
 2 SDCM - h=135 - □ 204x204 mm

ZERODIX 140 LED 2000LM CRI 80

REF N°	2700°K	3000°K	4000°K
on/off	264 25 095	264 25 195	264 25 295
DIM 1-10V	264 65 095	264 65 195	264 65 295
DIM DALI	264 35 095	264 35 195	264 35 295

Xicato LED - 19,5W - 2000lm @ 70°C
 □ - 230V/50Hz ⚡ - incl LED driver - Beam angle 90° - ▽ - IP20 ⚡ - 850°C
 2 SDCM - h=135 - □ 204x204 mm

ZERODIX 140 LED 3000LM CRI 80

REF N°	2700°K	3000°K	4000°K
on/off	264 26 095	264 26 195	264 26 295
DIM 1-10V	264 66 095	264 66 195	264 66 295
DIM DALI	264 36 095	264 36 195	264 36 295

Xicato LED - 29,3W - 3000lm @ 70°C
 □ - 230V/50Hz ⚡ - incl LED driver - Beam angle 90° - ▽ - IP20 ⚡ - 850°C
 2 SDCM - h=135 - □ 204x204 mm



TECHNICAL DATA SHEET




ZERODIX 140 IP20

INDOOR - INTERNO - INNENBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Fix (not adjustable) 0° - 0°

☐ 204x204 mm

Material : CALCYT® plaster and frosted diffuser

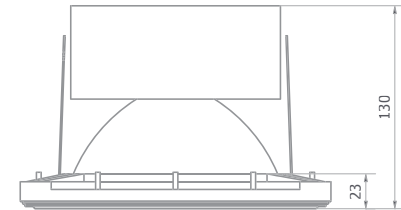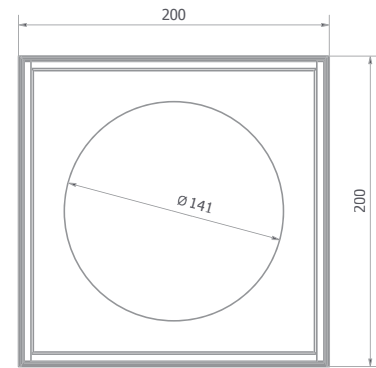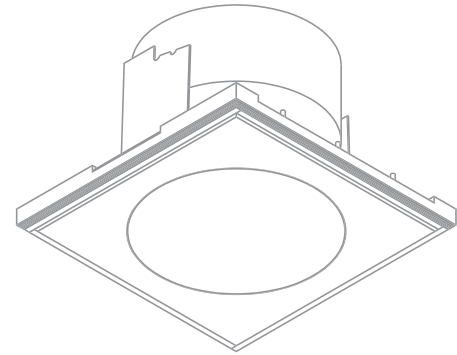

INSTALLATION KIT

STANDARD (included) installation system for ceiling 9 - 12 - 15 mm

REF N° 264 99 025 installation system for gypsum ceiling 25 mm

REF N° 264 99 030 installation system for gypsum ceiling 30 mm

ZERODIX 140 LED 2000LM CRI 97

REF N°	2700°K	3000°K	4000°K
on/off	264 25 990	264 25 890	264 25 790
DIM 1-10V	264 65 990	264 65 890	264 65 790
DIM DALI	264 35 990	264 35 890	264 35 790

Xicato LED - 29,3W - 2000lm @ 70°C
 ☐ - 230V/50Hz ⚡ - incl LED driver - Beam angle 90° - ▽ - IP20 ⚡ - 850°C
 2 SDCM - h=135 - ☐ 204x204 mm

ZERODIX 140 LED 4000LM CRI 80

REF N°	2700°K	3000°K	4000°K
on/off	264 27 090	264 27 190	264 27 290
DIM 1-10V	264 67 090	264 67 190	264 67 290
DIM DALI	264 37 090	264 37 190	264 37 290

Xicato LED - 34,1W - 3850lm @ 70°C
 ☐ - 230V/50Hz ⚡ - incl LED driver - Beam angle 90° - ▽ - IP20 ⚡ - 850°C
 2 SDCM - h=135 - ☐ 204x204 mm

ZERODIX 140 LED 2000LM CRI 80

REF N°	2700°K	3000°K	4000°K
on/off	264 25 090	264 25 190	264 25 290
DIM 1-10V	264 65 090	264 65 190	264 65 290
DIM DALI	264 35 090	264 35 190	264 35 290

Xicato LED - 19,5W - 2000lm @ 70°C
 ☐ - 230V/50Hz ⚡ - incl LED driver - Beam angle 90° - ▽ - IP20 ⚡ - 850°C
 2 SDCM - h=135 - ☐ 204x204 mm

ZERODIX 140 LED 3000LM CRI 80

REF N°	2700°K	3000°K	4000°K
on/off	264 26 090	264 26 190	264 26 290
DIM 1-10V	264 66 090	264 66 190	264 66 290
DIM DALI	264 36 090	264 36 190	264 36 290

Xicato LED - 29,3W - 3000lm @ 70°C
 ☐ - 230V/50Hz ⚡ - incl LED driver - Beam angle 90° - ▽ - IP20 ⚡ - 850°C
 2 SDCM - h=135 - ☐ 204x204 mm

TECHNICAL DATA SHEET




ZERODIX 70 IP54

BATHROOM - STANZA DA BAGNO - BADEZIMMER - BADKAMER - SALLE DE BAINS - CUARTO DE BAÑO

Fix (not adjustable) 0° - 0°

144x144 mm

Material : CALCYT® plaster and frosted diffuser

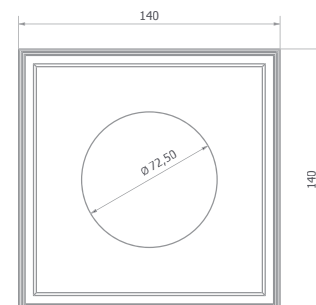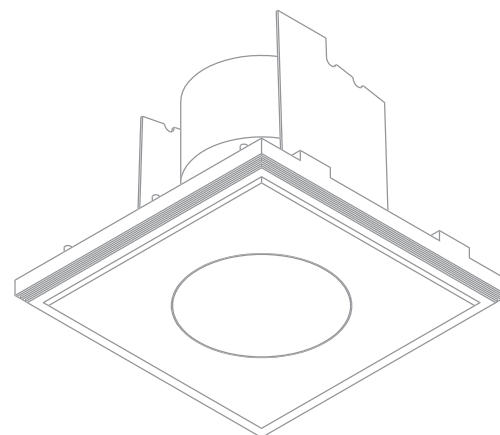

ZERODIX 70 LED 1000LM CRI 97

REF N°	2700°K	3000°K	4000°K
on/off	258 22 961	258 22 861	258 22 761
DIM 1-10V	258 62 961	258 62 861	258 62 761
DIM DALI	258 32 961	258 32 861	258 32 761

Xicato LED - 12,2W - 965lm @ 70°C
 □ - 230V/50Hz ⚡ - incl LED driver - Beam angle 60° - ▽ - IP20 (0.5m) - ⚡ CE - 850°C
 2 SDCM - h=115 - 144x144 mm

ZERODIX 70 LED 1000LM CRI 80

REF N°	2700°K	3000°K	4000°K
on/off	258 22 061	258 22 161	258 22 261
DIM 1-10V	258 62 061	258 62 161	258 62 261
DIM DALI	258 32 061	258 32 161	258 32 261

Xicato LED - 8,1W - 965lm @ 70°C
 □ - 230V/50Hz ⚡ - incl LED driver - Beam angle 60° - ▽ - IP20 (0.5m) - ⚡ CE - 850°C
 2 SDCM - h=115 - 144x144 mm

ZERODIX 70 LED 1300LM CRI 80

REF N°	2700°K	3000°K	4000°K
on/off	258 23 061	258 23 161	258 23 261
DIM 1-10V	258 63 061	258 63 161	258 63 261
DIM DALI	258 33 061	258 33 161	258 33 261

Xicato LED - 11,7W - 1300lm @ 70°C
 □ - 230V/50Hz ⚡ - incl LED driver - Beam angle 60° - ▽ - IP20 (0.5m) - ⚡ CE - 850°C
 2 SDCM - h=115 - 144x144 mm

INSTALLATION KIT

STANDARD (included) installation system for ceiling 9 - 12 - 15 mm

REF N° 258 99 025 installation system for gypsum ceiling 25 mm

REF N° 258 99 030 installation system for gypsum ceiling 30 mm

TECHNICAL DATA SHEET




ZERODIX 70 IP54

OUTDOOR - ESTERNO - AUßENBEREICH - EXTERIEUR - EXTÉRIEUR - EXTERIOR

Fix (not adjustable) 0° - 0°

144x144 mm

Material : waterproof CALCYT+® and frosted diffuser

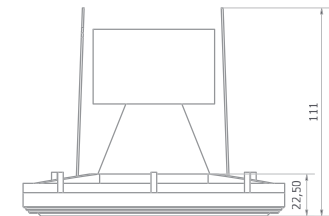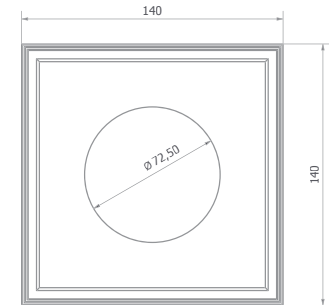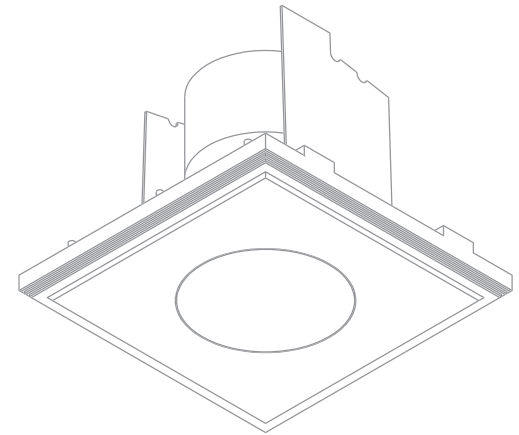

ZERODIX 70 LED 1000LM CRI 97

REF N°	2700°K	3000°K	4000°K
on/off	258 22 965	258 22 865	258 22 765
DIM 1-10V	258 62 965	258 62 865	258 62 765
DIM DALI	258 32 965	258 32 865	258 32 765

Xicato LED - 12,2W - 965lm @ 70°C
 □ - 230V/50Hz ⚡ - incl LED driver - Beam angle 60° - ▽ - IP20 (0.5m) - ⚡ CE - 850°C
 2 SDCM - h=115 - 144x144 mm

ZERODIX 70 LED 1000LM CRI 80

REF N°	2700°K	3000°K	4000°K
on/off	258 22 065	258 22 165	258 22 265
DIM 1-10V	258 62 065	258 62 165	258 62 265
DIM DALI	258 32 065	258 32 165	258 32 265

Xicato LED - 8,1W - 965lm @ 70°C
 □ - 230V/50Hz ⚡ - incl LED driver - Beam angle 60° - ▽ - IP20 (0.5m) - ⚡ CE - 850°C
 2 SDCM - h=115 - 144x144 mm

ZERODIX 70 LED 1300LM CRI 80

REF N°	2700°K	3000°K	4000°K
on/off	258 23 065	258 23 165	258 23 265
DIM 1-10V	258 63 065	258 63 165	258 63 265
DIM DALI	258 33 065	258 33 165	258 33 265

Xicato LED - 11,7W - 1300lm @ 70°C
 □ - 230V/50Hz ⚡ - incl LED driver - Beam angle 60° - ▽ - IP20 (0.5m) - ⚡ CE - 850°C
 2 SDCM - h=115 - 144x144 mm

INSTALLATION KIT

STANDARD (included) installation system for ceiling 9 - 12 - 15 mm

REF N° 258 99 025 installation system for gypsum ceiling 25 mm

REF N° 258 99 030 installation system for gypsum ceiling 30 mm



TECHNICAL DATA SHEET




ZERODIX 70 IP20

INDOOR - INTERNO - INNENBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Fix (not adjustable) 0° - 0°

144x144 mm

Material : CALCYT® plaster and frosted diffuser

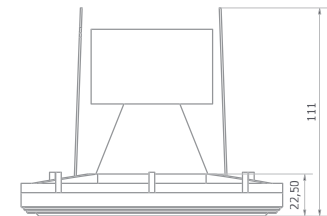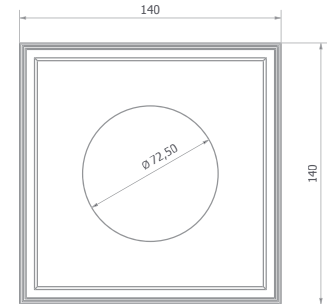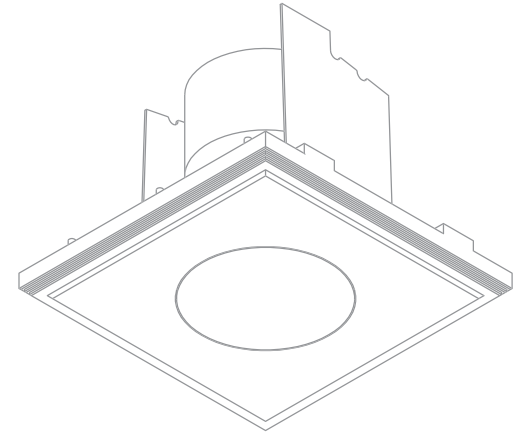

ZERODIX 70 LED 1000LM CRI 97

REF N°	2700°K	3000°K	4000°K
on/off	258 22 960	258 22 860	258 22 760
DIM 1-10V	258 62 960	258 62 860	258 62 760
DIM DALI	258 32 960	258 32 860	258 32 760

Xicato LED - 12,2W - 965lm @ 70°C
 □ - 230V/50Hz ⚡ - incl LED driver - Beam angle 60° - ▽ - IP20 ⚡ - 850°C
 2 SDCM - h=115 - 144x144 mm

ZERODIX 70 LED 1000LM CRI 80

REF N°	2700°K	3000°K	4000°K
on/off	258 22 060	258 22 160	258 22 260
DIM 1-10V	258 62 060	258 62 160	258 62 260
DIM DALI	258 32 060	258 32 160	258 32 260

Xicato LED - 8,1W - 965lm @ 70°C
 □ - 230V/50Hz ⚡ - incl LED driver - Beam angle 60° - ▽ - IP20 ⚡ - 850°C
 2 SDCM - h=115 - 144x144 mm

ZERODIX 70 LED 1300LM CRI 80

REF N°	2700°K	3000°K	4000°K
on/off	258 23 060	258 23 160	258 23 260
DIM 1-10V	258 63 060	258 63 160	258 63 260
DIM DALI	258 33 060	258 33 160	258 33 260

Xicato LED - 11,7W - 1300lm @ 70°C
 □ - 230V/50Hz ⚡ - incl LED driver - Beam angle 60° - ▽ - IP20 ⚡ - 850°C
 2 SDCM - h=115 - 144x144 mm

INSTALLATION KIT

STANDARD (included) installation system for ceiling 9 - 12 - 15 mm

REF N° 258 99 025 installation system for gypsum ceiling 25 mm

REF N° 258 99 030 installation system for gypsum ceiling 30 mm